

# TRADITIONAL

# Regal


Steel | Thickness: 2"

Non-insulated with optional polystyrene vinyl-backed insulation

### MODEL PATTERNS AND LAYOUTS


#### Shaker-Flat





#### Classic










# Regal

Steel | Thickness: 2"

Non-insulated with optional polystyrene vinyl-backed insulation

### MODEL PATTERNS AND LAYOUTS

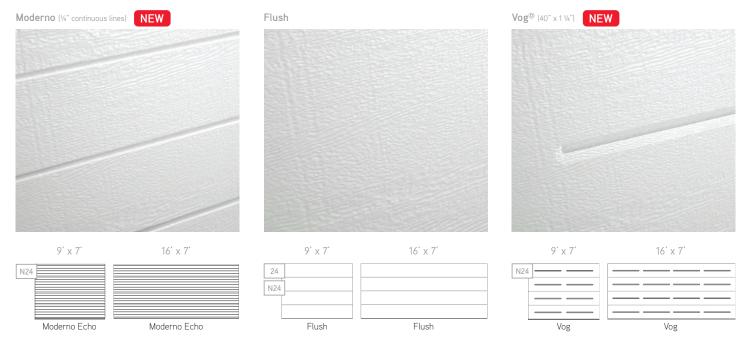




# CARRIAGE HOUSE

## Regal


Steel | Thickness: 2"


Non-insulated with optional polystyrene vinyl-backed insulation


#### MODEL PATTERNS AND LAYOUTS























#### COLORS

#### Standard

Premium

Faux Wood

Black Ice

Dark Walnut

CONSTRUCTION

1 3 options of outside layer: steel,

heavy duty steel or commercial grade steel for high durability 2 2" tongue-and-groove meeting

rail to provide a weathertight seal between sections, and rails are hemmed the entire length of the section for added strength and safety

3 20-gauge galvanized end and center stiles to increase strength

4 Polystyrene vinyl-backed

WINDLOAD





NEW

NEW



Terrastone

4/5 4/5 Satin





Privacy Level: X/5

Clear

Charcoal

Weathered Grey

Single-layer: steel OR Double-layer: steel + insulation

Sandstone Brown


Windows available in 20" x 13" and 41" x 16"

Decorative inserts<sup>1</sup>

**WINDOWS** 

Types of Glass



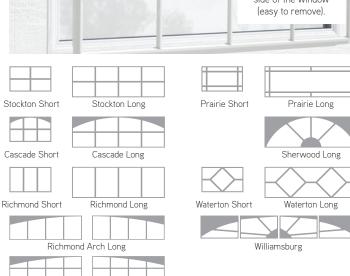

<sup>1</sup> To know what size decorative inserts are available for each door design and construction, visit garaga.com/designcentre.

#### - Option for the 24 and N24. 8' high door layouts construction

insulation available as an option

An 8' Regal door has 5 sections.

and durability



Wind load reinforcement

available as an option

Regal 24 / N24 / N25

#### SIZES

Standard widths from 8' to 20' for the 24 and N24; 8' to 18' for the N25, in 1" increments. Heights from 6'6" to 8', in 3" increments. See your garage door dealer for more details on oversized doors available.

#### WARRANTY

Double Stockton Arch Long

Door: 15 years (limited) Bolted Hardware: 1 year Weatherstripping: 1 year



Interior view

24 / N24 / N25

#### CONSTRUCTION SUMMARY

CONSTRUCTION SOMMARY			
	24	N24	N25
Outside layer	Commercial grade steel	Heavy duty steel	Steel
Section height	18", 21"	18", 21"	18", 21"
	LAYOUT	S	
Shaker-Flat Short		19" x 15"	
Shaker-Flat Long		40" x 15"	
Classic Short	20" x 14"	20" x 14"	20" x 14"
Classic Long		42" x 14"	42" x 14"
Flush	•	•	
Moderno Echo		Continuous lines	
Vog		40" x 1 1/4"	
Shaker-Slat Two		40" x 15"	
Shaker-Slat Four		40" x 15"	
Shaker-Flat XSmall		41" x 13"	41" x 13"
Shaker-CS Short		19" x 15"	19" x 15"
Shaker-CS Long		40" x 15"	40" x 15"
	COLOR		
	White	White	White
		Almond	Almond
		Sahara	Sahara
		Sandstone	Sandstone
		Terrastone	
		Brown	
		Black Ice	
		Charcoal	
		Dark Walnut	
		Weathered Grey	
Window layout	Optional	Optional	Optional
Wind load			



### LiftMaster.

POWERED BY MY Q.



- Ultra quiet
- Belt or chain drive
- ¾ HP, AC or DC power
- Integrated camera for some models



- Ultra quiet
- Jackshaft
- DC power





- Quiet
- Belt or chain drive
- ½ HP, AC or DC power

#### CONTRACTOR SERIES®

Quiet and reliable garage door openers



- Wi Ei
- Quiet • Belt or chain drive
- ½ HP, AC or DC power



Consult garaga.com/res-openers or scan the QR code to view all available openers and accessories.



US Head Office 1 844 918-2828 Ponca City, OK

Canadian Head Office 1800 464-2724 St-Georges, QC



















logo FSC

YOUR **DISTRIBUTOR**